





AUSTRALIAN OWNED & OPERATED



There's nothing more comforting than sitting in front of a roaring wood fire and enjoying the warmth it brings to your home.

At Kent, we have designed a wide range of heaters to suit any space, style and budget to ensure your family is kept warm on even the coldest nights.


Sleek, modern design or rustic traditional charm – you'll find a Kent wood heater that's right for you.

Kent wood heaters are designed and tested in Australia for the harshest of Australian winters





3 speed fan control helps circulate heat. Available on all convection heaters



Firebox is lined with **firebricks** or **SKAMOLEX™**



Self-cleaning large door glass for an unobstructed view of your fire

Kent heaters are more efficient than ever and better for you and the environment!

Our range of heaters burn up to 2 times cleaner than the national standard for emissions. Plus, the increased efficiency means your heater will burn less fuel to heat your home.

Installation

We strongly recommend the use of a Maxiheat flue system and professional installation. Maxiheat flue systems are designed, tested in Australia to meet the relevant Standard AS/NZS 2918. It is important to check local regulations prior to installation as well as specifications provided in the instruction manual. For more information visit our website (www.kentwoodheaters.com.au)



Fairlight

Freestanding

Product Specifications

Heater: 780H x 981W x 496D mm Bench: 315H x 1190w x 496D mm Coverage: up to 300m² Peak Heat Output: 14.9kW Burn Time: up to 8.5 hours Maximum Log Size: 330-700mm Construction: 5mm steel firebox with Skamolextm lining Baffle: 25mm Skamolex baffle Fan: 2 x single barrel 3 speed remote controlled fans Firebox Size: 0.06m³ Warranty: 10 Year Firebox Zero Clearance

BurnVV	ISE An initiative of the Australian Home Heating Association	
EFFICIENCY	This model Australian Standard	67% >60%
PARTICLE EMISSIONS	This model Australian Standard	0.7g/kg <1.5g/kg

Touch button dual fans with remote control





Modern landscape design

Insert KTFLIN17MB

Product Specifications

Coverage: up to 280m² Peak Heat Output: 10.9kW Burn Time: up to 8 hours Maximum Log Size: 330-700mm Construction: 5mm steel firebox with SKAMOLEX™ lining Firebox Size: 0.06m³ Baffle: 25mm Skamolex baffle Fan: 2 x single barrel 3 speed remote controlled fans Warranty: 10 Year Firebox Zero Clearance

LIVING

BurnWise An initiative of the Australian Home Heating Association

EFFICIENCY	This model	60%
EFFICIENCI	Australian Standard	>60%
PARTICLE	This model	0.7g/kg
EMISSIONS	Australian Standard	<1.5g/kg

Calisto

Striking in design with minimalist lines, the 'Calisto' series will add a touch of modern style to any home.

This stunning range features some of the cleanest burning models on the market, burning up to 2 times cleaner than the national standard for emissions.






Zero Clearance installation

Transform a dull blank wall into a magnificent fireplace without major structural alterations or existing brick chimney. Simply purchase a Zero Clearance box and flue kit (MXZEROBOX + MXFK3Z) with any Kent Calisto heater and enjoy the benefits of a built in fireplace without the extensive construction.

Refer to instruction manual or website (www.kentwoodheaters.com.au) for additional information, including minimum clearances and hearth specifications.

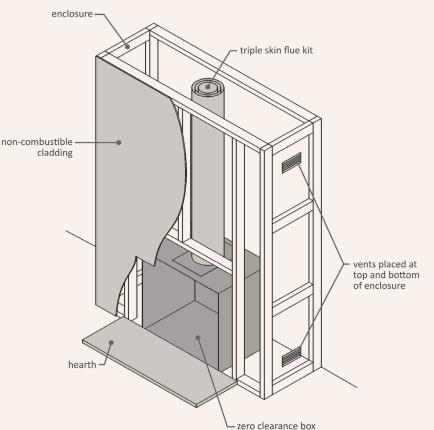

* Drawing is a guide only

Small Insert

Product Specifications

Coverage: up to 180m² Peak Heat Output: 9.7kW Burn Time: up to 6 hours Maximum Log Size: 320mm Construction: 6mm steel firebox Firebox Size: 0.04m³ Baffle: 25mm Skamolex baffle Fan: Push button 3 speed factory fitted Warranty: 10 Year Firebox



Zero Clearance compatible MXZEROBOX

BurnWise An initiative of the Australian Home Heating Association				
EFFICIENCY	This model Australian Standard	70% >60%		
PARTICLE EMISSIONS	This model Australian Standard	1.0g/kg <1.5g/kg		

Recommended Hearth: Maxiheat Insert Hearth (MXTHINSBLK/GRY)

Medium Insert **Product Specifications**

Coverage: up to 280m² Peak Heat Output: 10.8kW Burn Time: up to 7.5 hours Maximum Log Size: 370mm Construction: 6mm steel firebox Firebox Size: 0.07m³ Baffle: 25mm Skamolex baffle Fan: Push button 3 speed factory fitted Warranty: 10 Year Firebox



Zero Clearance compatible MXZEROBOX

BurnWise An initiative of the Australian Home Heating Association				
EFFICIENCY	This model Australian Standard	62% >60%		
PARTICLE EMISSIONS	This model Australian Standard	0.9g/kg <1.5g/kg		

Recommended Hearth: Maxiheat Insert Hearth (MXTHINSBLK/GRY)

Large Insert KTCALGEIN18MB

Product Specifications

Coverage: up to 300m² Peak Heat Output: 16.6kW Burn Time: up to 8 hours Maximum Log Size: 370mm Construction: 6mm steel firebox Firebox Size: 0.1m³ Baffle: 25mm Skamolex baffle Fan: Push button 3 speed factory fitted Warranty: 10 Year Firebox Zero Clearance compatible MXZEROBOX



BurnWise An initiative of the Australian Home Heating Association			
EFFICIENCY	This model Australian Standard	63% >60%	
PARTICLE EMISSIONS	This model Australian Standard	0.7g/kg <1.5g/kg	

Recommended Hearth: Maxiheat Insert Hearth (MXTHINSBLK/GRY)

Small TCASML18MB

Product Specifications

886H x 609W x 508D mm Coverage: up to 200m² Peak Heat Output: 12.1kW Burn Time: up to 7 hours Maximum Log Size: 320mm Construction: 6mm steel firebox Firebox Size: 0.04m³ Baffle: 25mm Skamolex baffle Fan: Push button 3 speed factory fitted



Warranty: 10 Year Firebox

BurnWise An initiative of the Australian Home Heating Association			
EFFICIENCY	This model Australian Standard	69% >60%	
PARTICLE Emissions	This model Australian Standard	0.7g/kg <1.5g/kg	

Recommended Hearth: Maxiheat 1m Tiled Hearth (MXTH1BLK2/GRY)

Medium KTCAMED18M **Product Specifications**

936H x 669W x 558D mm Coverage: up to 300m² Peak Heat Output: 12.3kW Burn Time: up to 8.5 hours Maximum Log Size: 370mm Construction: 6mm steel firebox Firebox Size: 0.07m³ Baffle: 25mm Skamolex baffle Fan: Push button 3 speed factory fitted



Warranty: 10 Year Firebox

BurnW	ISE An initiative of the Australian Home Heating Association	
EFFICIENCY	This model Australian Standard	75% >60%
PARTICLE EMISSIONS	This model Australian Standard	0.6g/kg <1.5g/kg

Recommended Hearth: Maxiheat 1m Tiled Hearth (MXTH1BLK2/GRY)

Large KTCALGE18MB

Product Specifications

986H x 769W x 558D mm Coverage: up to 320m² Peak Heat Output: 16.6kW Burn Time: up to 9.5 hours Maximum Log Size: 370mm Construction: 6mm steel firebox Firebox Size: 0.1m³ Baffle: 25mm Skamolex baffle Fan: Push button 3 speed factory fitted Warranty: 10 Year Firebox



Burn W	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model Australian Standard	64% >60%
PARTICLE EMISSIONS	This model Australian Standard	0.7g/kg <1.5g/kg

Recommended Hearth: Maxiheat 1.2m Tiled Hearth (MXTH12BLK2/GRY)

<section-header>

KENT

Country Classic MKII

Product Specifications

840H x 737W x 567D mm Coverage: up to 300m² Peak Heat Output: 17.3kW Burn Time: up to 8.5 hours Maximum Log Size: 390mm Construction: 6mm steel firebox Firebox Size: 0.09m³ Baffle: 8mm steel Fan: 3 speed factory fitted Warranty: 10 Year Firebox

BurnW	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model Australian Standard	76% >60%
PARTICLE EMISSIONS	This model Australian Standard	0.7g/kg <1.5g/kg

Recommended Hearth: Maxiheat 1.2 Tiled Hearth (MXTH12BLK2/GRY)

Somerset MKII

Product Specifications

790H x 677W x 517D mm Coverage: up to 200m² Peak Heat Output: 10.9kW Burn Time: up to 8 hours Maximum Log Size: 370mm Construction: 6mm steel firebox Firebox Size: 0.06m³ Baffle: 8mm steel Fan: 3 speed factory fitted Warranty: 10 Year Firebox



designed wood heater is perfect for heating medium to large sized spaces. The large glass viewing window will ensure everyone enjoys a view of the crackling fire.

This minimalistic

Perfect for heating small to medium sized spaces. Constructed of solid 6mm steel, this Kent wood heater is strong and efficient.

BurnWise An initiative of the Australian Home Heating Association

EFFICIENCY	Australian Standard	>60%
PARTICLE	This model	1.0g/kg
EMISSIONS	Australian Standard	<1.5g/kg

Recommended Hearth: Maxiheat 1.2 Tiled Hearth [MXTH12BLK2/GRY]

Jindabyne

Product Specifications

785H x 560W x 525D mm Coverage: up to 180m² Peak Heat Output: 13.3kW Burn Time: up to 7.5 hours Maximum Log Size: 370mm Construction: 6mm steel firebox Firebox Size: 0.06m³ Baffle: 8mm steel Warranty: 10 Year Firebox

Burn W	ISE An initiative of the Australian Home Heating Association	
EFFICIENCY	This model Australian Standard	69% >60%
PARTICLE EMISSIONS	This model Australian Standard	1.2g/kg <1.5g/kg

Recommended Hearth: Maxiheat 1 Tiled Hearth [MXTH1BLK2/GRY] when using Maxiheat Flue Kit with double shield [MXFKT3K]



Perfect for smaller spaces, the Jindabyne is rustic in design. The included trivet accessory is perfect for cooking soups and stews or boiling the kettle.


FREESTANDING		Sic	Side		Hearth	Hearth Min Dimensions		Rear
HEATERS		Rear Wall	Wall	Corners	Front	Width	Depth	to Flue Centre
All measurements are in mm		Α	В	С	D	Ε	F	G
FAIRLIGHT*	Maxiheat Standard Metallic Black Default Flue Kit (includes double shields) MORKIDER Maxiheat Decromesh Metallic Black Default Flue Kit (inner & outer shields) MORKOESME - MAXIHeat Non-Perforated Metallic Black Flue Kit (inner & outer shields) MORKOEME - MORKOEME	200 200 200	300 300 300	25	400	1190	900	179
COUNTRY CLASSIC MKII	Maxiheat Standard Metallic Black Default Flue Kit (includes double shields) MXRKSDAMB - Maxiheat Decromesh Metallic Black Default Flue Kit MXRXECSMB Maxiheat Non-Perforated Metallic Black Flue Kit (includes inner shield) MXRCOSMB	200 200 250	325	70 100 100	300	1049	885	199
SOMERSET MKII	Maxiheat Standard Metallic Black Default Flue Kit (includes double shields) ^{MORTEMB} Maxiheat Decromesh Metallic Black Default Flue Kit (with flue spigot shield - included) Maxiheat Non-Perforated Metallic Black Flue Kit (includes inner shield) ^{MORTEGDAMB}	200 200 250	450 325 325	100	300	999 999 1049	885	199
JINDABYNE	Maxiheat Standard Default Stainless Kit MORATISS Maxiheat Standard Default Stainless Flue Kit with single shield MORATISS + MORSISS2 Maxiheat Decromesh Default Flue Kit MARADECSX Maxiheat Standard Default Stainless Flue Kit with double shields MARATISS + MARSISS2 + MARSOB2	475 250 250 150	800	525	300	850	850	175
CALISTO SMALL	Maxiheat Decromesh Metallic Black Default Flue Kit MARAGECIMB Maxiheat Non-Perforated Metallic Black Flue Kit (includes inner shield) MARKSDIMB	70	135 150	10	300	875 890	878	182
CALISTO MEDIUM	Maxiheat Decromesh Metallic Black Default Flue Kit MARGECIMB Maxiheat Non-Perforated Metallic Black Flue Kit (includes inner shield) MARKSOIMB	70	240	50	300	935	928	182
CALISTO LARGE	Maxiheat Decromesh Metallic Black Default Flue Kit (outer shield) MKRKDECIMB - MKRKDEZ Maxiheat Non-Perforated Metallic Black Flue Kit (includes inner shield) MKRKDIMB	150	400	200	470	1035	1178	182

* Refer to Kent Fairlight instruction manual for additional hearth specifications. The hearth must be 40mm thick, We recommend using the Maxiheat Square Tiled Hearth (MXTHSQ12BLK/GRY) or equivalent.

With all freestanding and inbuilt heaters, use a non-combustible hearth to protect your flooring and its surrounding area.

Refer to instruction manual or website (www.kentwoodheaters.com.au) for additional information, including minimum clearances and hearth specifications.





ns	INSERT HEATERS All measurements are in mm	Fascia (mm)		Cabinet (mm)				Rear of Fascia
sion		Height	Width	Height	Width	Depth	Hearth (mm)	to Centre Flue
Insert Dimens	FAIRLIGHT INSERT ZERO CLEARANCE	626	1145	651	1071	550	600(D) x 1200(W) x 56 thick including a 15mm air gap (MXTHINSBLK/ GRY or equivalent)	292
	CALISTO SMALL INSERT	696	761	625	580	416		268
	CALISTO SMALL ZERO CLEARANCE	696	761	817	838	578		268
	CALISTO MEDIUM INSERT	746	821	675	640	466		318
	CALISTO MEDIUM ZERO CLEARANCE	746	821	817	838	578		318
	CALISTO LARGE INSERT	796	921	725	740	466		318
	CALISTO LARGE ZERO CLEARANCE	796	921	817	838	578		318

D

F

Refer to Instruction manual for installation specifications such as clearances to combustible materials and hearth construction. Peak heat output and burn times may vary depending on fuel type, moisture content and loading. Kent wood heaters have been tested with Maxiheat flue systems and comply with the MOST RECENT Australian Standards ASNZS2918. Heating output may vary depending on climate conditions and house design.

All insert heaters must be installed in a full masonry cavity as per the MOST RECENT Australian Standards ASNZS2918. All Kent insert wood heaters have been tested with a 56mm thick hearth which includes a 15mm air gap. Details provided in this brochure regarding the installation of a Zero Clearance system are for information purposes only and should not be relied upon as full installation instructions. Due to on-going product development, details and specifications for the wood heater collection may be subject to change without notice. Please check with your local retailer.





Australia through its membership of the AHHA

KENT THE FLAME OF THE FUTURE GLG Australia Pty Ltd Building A2, Campus Business Park 350-374 Parramatta Rd, Homebush NSW 2140 Ph 02 9735 4100 info@kentwoodheaters.com.au www.kentwoodheaters.com.au